


1 . Network Setup



Static

Static IP address can be used by enter the reserved IP address.

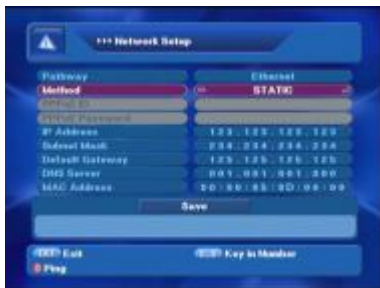

EXIT : Exit

RED Key : Ping



DHCP

DHCP(Dynamic Host Configuration Protocol) IP address and all the basic TCP/IP protocol are setting in the STB.



EXIT : Exit

RED Key : Ping

YELLOW Key : Value(+)

Blue Key : Value(-)



PPPoE


It is one to one Ethernet communication protocol and it also can be controlled by ID and PW.



EXIT : Exit

RED Key : Ping

GREEN Key : Edit

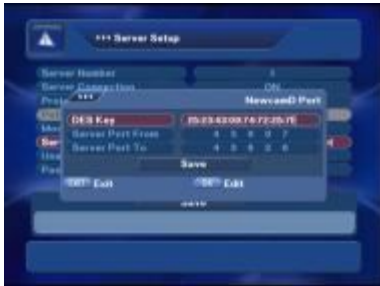

8 . Des Key

Key in Des key

9 . Server Port From

Key in Starting Sever Port Number

10. Server Port To

Key in Ending Server Port Number



11. Then, press ; Save;



12. You can see Server Information



Red key (Port update) - Update information of one port.
Green key (All port update) - Update information of all port.